

B-HPC

B- HPC

S

ANSI B16.104

GB/T4213-2008 JB/T7387-2014

DN 40-300

0.01

ANSI B16.104-1976

10 -7

ANSI 16.104-1976


1

3

± 1

± 5

50:1

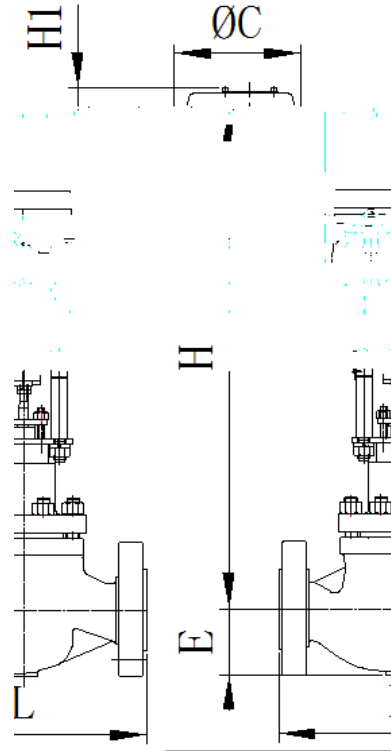

DN	L												
	JIS 63K	ANSI 900			ANSI 1500				ANSI 2500				
	RF	RF	SW	BW	RJ	RF	SW	BW	RJ	RF	SW	BW	RJ
40	323	333			333	333			333	358			361
50	354	375			378	375			378	400			403

			40			50			80			100			150			200			250	300
			25	32	40	32	40	50	50	65												

DN			H	ΦB	C	E	
40	HA3D R	ANSI 900 JIS 63K	735	350	363		

H1

DN			H	C	E	H1	
40	IQL04	ANSI 900 JIS 63K	755	172	100 105 120	100	
	IQL08	ANSI 1500 ANSI 2500	790/835	229		115	
50	IQL04	ANSI 900 JIS 63K	785	172	110 120 130	100	
	IQL08	ANSI 1500 ANSI 2500	825/860	229		115	
80	IQL06	ANSI 900 JIS 63K	780	172	140 150 165	100	
	IQL10	ANSI 1500 ANSI 2500	860/895	229		115	
100	IQL08	ANSI 900 JIS 63K	855	172	160 170 195	115	
	IQL12	ANSI 1500 ANSI 2500	895/940	229		115	
150	IQL10	ANSI 900 JIS 63K	955	229	210 225 260	115	
	IQL20	ANSI 1500 ANSI 2500	1155/1335	258		230	
200	IQL12	ANSI 900 JIS 63K	1055	229	280 290 330	115	
	IQL25	ANSI 1500 ANSI 2500	1255/1285	258		230	
250	IQL20	ANSI 900 JIS 63K					
	IQL25	ANSI 1500 ANSI 2500					
300		ANSI 900 JIS 63K					
		ANSI 1500 ANSI 2500					